


Ref. **3102**

MACHO RECTO MÁQUINA WHITWORTH MANGO REFORZADO

Reinforced Shank Whitworth Machine Straight Tap
Taraud Droit Machine Whitworth Queue Renforcée



HSSE 5%Co	DIN 371	B 3,5-5h	GUN	α 10-12°
--------------	------------	-------------	-----	--------------------

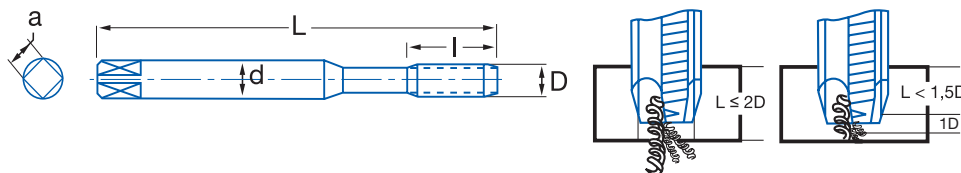

Material		Vc
Grupo	Sub.	5%Co
1	1.1	6-10
3	3.1	7-10
	3.2	4-7
5	5.1	5-8
	5.2	8-12
6	6.1	15-35
	6.2	14-20
	6.3	12-15

Vc= m/min.

W	Hilos Threads Filets	L mm	l mm	d mm	a mm	Z	Nº Art. 5% Co	€
W1/8	40	56	11	3,50	2,70	3	62897	20,80
W5/32	32	63	13	4,50	3,40	3	62915	20,80
W3/16	24	70	15	6,00	4,90	3	62903	20,80
W1/4	20	80	17	7,00	5,50	3	62894	23,68
W5/16	18	90	20	8,00	6,20	3	62912	27,72
W3/8	16	100	22	9,00	7,00	3	73766	30,63


Ref. **3202**

MACHO RECTO MÁQUINA WHITWORTH

Whitworth Machine Straight Tap
Taraud Droit Machine Whitworth



HSSE 5%Co	DIN 376	B 3,5-5h	GUN	α 10-12°
--------------	------------	-------------	-----	--------------------

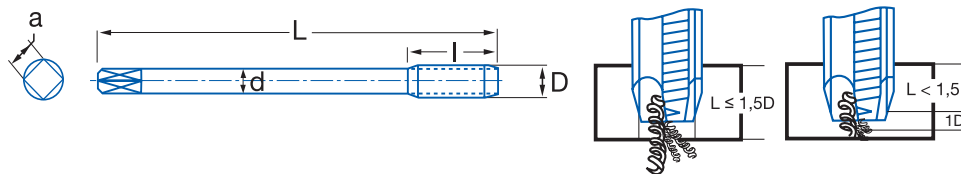

Material		Vc
Grupo	Sub.	5%Co
1	1.1	6-10
3	3.1	7-10
	3.2	4-7
5	5.1	5-8
	5.2	8-12
6	6.1	15-35
	6.2	14-20
	6.3	12-15

Vc= m/min.

W	Hilos Threads Filets	L mm	l mm	d mm	a mm	Z	Nº Art. 5% Co	€
W1/4	20	80	17	4,50	3,40	3	59861	19,13
W5/16	18	90	20	6,00	4,90	3	14979	22,40
W3/8	16	100	22	7,00	5,50	3	70420	24,75
W7/16	14	100	22	8,00	6,20	3	70446	31,25
W1/2	12	110	24	9,00	7,00	3	70417	32,71
W9/16	12	110	26	11,00	9,00	3	70447	44,94
W5/8	11	110	27	12,00	9,00	3	70443	42,46
W3/4	10	125	30	14,00	11,00	4	70419	63,34
W7/8	9	140	32	18,00	14,50	4	70444	77,03
W1"	8	160	36	18,00	14,50	4	70449	96,84